


RECOMMENDED PCB LAYOUT

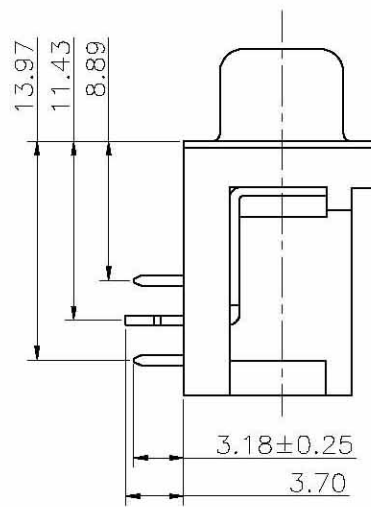

NOTE
 MATERIAL
 BODY&LATCH: PBT+30%GF
 CONTACTS: BRASS
 SHELL:SPCD
 CONTACT PLATING: GOLD PLATING OVER NICKEL
 ELECTRICAL SPECIFICATION
 CURRENT RATING: 5A;
 CONTACT RESISTANCE: 25mΩ MAX.
 INSULATION RESISTANCE:5000MΩ MIN,AT DC 500V.
 DIELECTRIC WITHSTANDING VOLTAGE:AC 1000/60sec.R.M.S.
 PART NO. DESCRIPTION:
 10 4-15 1 X 5 X XX 01
 SERIES NO: SERIAL NUMBER
 PRODUCT KIND: COLOR CODE:
 PIN NUMBER: 01:WHITE;05.BLUE
 FEMALE: PLATING CODE:
 A=1u' B=3u'
 NUT TYPE:1=NO LOCK NUT
 2=LOCK NUT;3=ADD NUT
 DIP HIGH:5=8.89mm

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差參考表		GC ELECTRONIC CO.LTD.				
				TITLE: HDR 15P MALE 鍍線鐵殼		
X.X ±0.30	X.X° ±3°	APPD:	PRODUCT NO:			
X.XX ±0.20	X.XX° ±1°	CHECK:	DATE	SCALE	UNIT	PAGE
X.XXX ±0.10	X.XXX° ±0.5°	DRAW:	05.09.30	FREE	MM	Z 1